



Trekker Insert shown in Porcelain Twilight with metal surround and Porcelain Twilight cast iron trim

Quadra-Fire Pellet Inserts provide an instant upgrade to any hearth, designed to be retrofitted into an existing wood-burning fireplace, transform your drafty old fireplace into a powerful, efficient and clean burning heat source.

Trekker



Classic Bay 1200



Santa Fe



	Trekker	Classic Bay 1200	Santa Fe
Peak BTU/hr Input ¹	51,000	48,500	30,600
Heating Capacity ²	1,300 - 2,900 sq ft	1,000 - 2,700 sq ft	700 - 1,900 sq ft
Efficiency ³	83% (LHV)/78% (HHV)	68% (LHV)/64% (HHV)	70% (LHV)/66% (HHV)
Burn Rate	1.9-5.9 lb/hr	1.9-5.3 lb/hr	1.0-3.4 lb/hr
Emissions	.74 g/h	.8 g/h	1.1 g/h
Hopper Capacity	52 lbs	75 lbs	45 lbs
Viewing Area	284 sq in	168 sq in	168 sq in
Actual Weight	425 lbs	243 lbs	214 lbs
Technology	E2	OE	OE

EXCLUSIVE TECHNOLOGIES

Efficient Energy

Efficient Energy (E2) technology saves money by using less fuel and adjusting the blower to maintain room temperature. It offers five manual heat settings and includes a standard 7-day wireless programmable thermostat for personalized comfort control.

Original Energy


Original Energy (OE) uses an aluminum heat exchange system with three heat settings for performance. The patented jam-free feed system and easy-clean firepot ensure reliable heat. A standard wall thermostat lets you set your desired room temperature and walk away.

3 Easy Steps To Upgrade Your Existing Wood-Burning Fireplace

STEP 1: Measure Your Existing Fireplace

The height, width and depth of the existing fireplace opening is needed to ensure selection of an appropriately sized insert:

- A. Fireplace front width _____ D. Fireplace Depth _____
 B. Fireplace front height _____ E. Hearth to mantel height _____
 C. Fireplace back width _____ (based on a 12" deep combustible mantel)

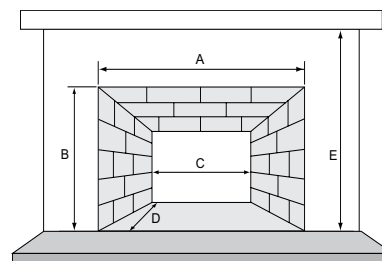

*If mantel depth is 10" or less, then E = 39-3/4".

Minimum Fireplace Opening

	A	B	C	D	E
Trekker	32-1/4" (819mm)	24-3/8" (619mm)	24-1/8" (613mm)	16-5/8" (422mm)	41-3/4" (1060mm)*
Classic Bay 1200	29-3/4" (756mm)	19-3/4" (502mm)	22-1/2" (572mm)	13-1/4" (337mm)	37-1/2" (953mm)
Santa Fe	29-3/8" (746mm)	23-1/4" (591mm)	24-1/8" (613mm)	13" (330mm)	37-3/8" (949mm)

STEP 2: Select a Surround

Surrounds remove the gap between the fireplace insert and existing fireplace opening. Choose from numerous sizes and styles for a unique look.



Metal surround with outside cast iron trim available in 3 finishes: Classic Black, Porcelain Mahogany, and Porcelain Twilight (Trekker only)



Classic Black metal surround in 2 sizes available with outside metal trim in 3 finishes: Classic Black, Black Nickel, and Satin Nickel (not all finishes offered for every model)



STEP 3: Customize Your Insert

Make it your own. Select stunning finish options and accessories.




Optional log set gives you the look of burning logs. Available for all models.



Optional remote control thermostat allows you to run your appliance based on your personal comfort level. Available for all models.

Specifications

	A	B	C	D	E	F	G
Trekker	32" (813mm)	23-7/8" (606mm)	15" (381mm)	13-1/8" (333mm)	29-3/4" (756mm)	26-7/8" (683mm)	24-1/8" (613mm)
Classic Bay 1200	29-1/4" (743mm)	22" (559mm)	13" (330mm)	13-5/8" (346mm)	25-1/2" (648mm)	24" (610mm)	19-1/2" (495mm)
Santa Fe	28-7/8" (733mm)	23-5/8" (600mm)	12-3/4" (324mm)	9-1/2" (241mm)	25-3/8" (645mm)	22-3/8" (568mm)	23" (584mm)

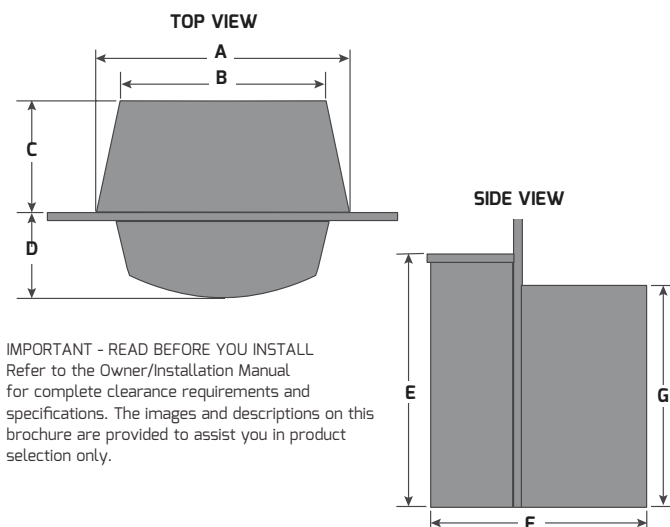

IMPORTANT - READ BEFORE YOU INSTALL
 Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions on this brochure are provided to assist you in product selection only.

Scan to learn more about our pellet inserts



For full warranty details, visit www.forgenflame.com. All Quadra-Fire pellet inserts are certified to EPA standards.

1: BTU/hour input based on the high feed rate per hour multiplied by BTU content of test fuel pellets. Fuel density and pellet shape will affect hopper capacity. 2: See your local Quadra-Fire dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. 3: Weighted average LHV (Low Heating Value) efficiency. HHV (High Heat Value) efficiency used to qualify products for Tax Credit beginning in 2023.

IMPORTANT - READ BEFORE YOU INSTALL! Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions in this brochure are provided to assist you in product selection only.

Quadra-Fire is a registered trademark of Hearth & Home Technologies. Product specifications and pricing subject to change without notice.

Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away.

FORGENFLAME.COM